



Features and Functions

1. Adjustable sensitivity of each detection zone
2. Multi-alarm sounds to choose
3. Operating frequency can be adjusted manually or automatically
4. Detection technology: Even detection technology, no blind spot
5. Internet technology: Remote upgrade system and remote control system
6. Working band: 50 working bands
7. Sensitivity of each detection zone: 400 level
8. Security level: 100 level
9. Statistics: Record the pass and alarm numbers
10. Query function: The system has real-time information query function
11. Intelligent Standby: The system has intelligent standby operation alerts
12. Detection speed: more than 60 people pass and detect in 1 minute

Advanced function

1. Intelligent partition: Can change detection zones according to customers' demands

For example convert 6 zones to 12 zones or 18 zones (optional)

2. Can connect PC terminal that change specification of WTMD

anytime, anywhere (optional)

3. We integrated 72 application occasions in the program, so can change all zones

Sensitivity when you choose different occasions

4. Have 4 kinds of infrared mode: IR ON/IR OFF/Front group IR ON/Back group IR ON



SAFETY ARSENAL TECHNOLOGY PROVIDER.. S.A.R.L

E-mail: contact@safetyarsenal.com


web : www.safetyarsenal.com

Adresse : 01 RUE NOURI SIDI FRADJ LA SOUKRA 2036 ARIANA- Tel fax : '00216'70858084

Technical Parameters

Model Number	Arsenal-600T.S
Vertical dimension	2200x480x930mm
Vertical channel size	2000x750mm
Packing size	2270 X 700 X 230 mm
Net weight of main box/detection door	44KG
Gross weight of main box/detection door	52KG
Detection zones	6 zones
Working voltage	AC90V~240V50/60Hz
Power consumption	20W
Each zone sensitivity	1-400 Level
Security level	100 Level
Working frequency range	1-50bands
Working environment temperature	-20°C~65°C

Dimension

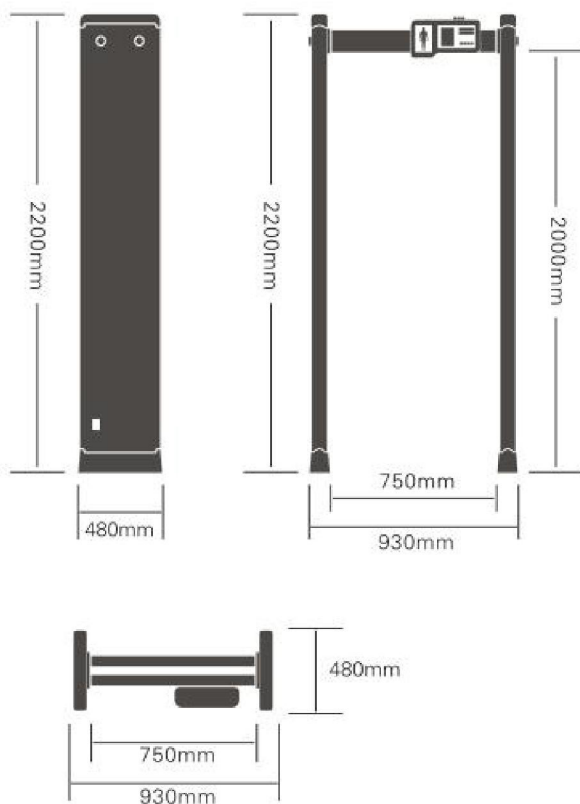

Advanced Functions and Features

Portable metal can be excluded	●
Dual high-brightness red LED display	●
Using 5.7-inch LCD screen	/
Integrated four key panels operation	●
One-button remote control operation mode	○
Multiple network ports	●
External control alarm device port	●
Secondary development port/ upgrade port	●
Count the number of people passing through	●
The function of counting Alarm times	●
Query the number of people in and out	○
Query the total number of historical memory	●
Multi zones detect and alarm at the same time	●
Smart partition function to detect large objects	●
The super brightness SMD	●
Super brightness SMD double zones indicator	●
10 alternative operating frequencies	/
50 alternative operating frequencies	●
The alarm sound mute mode settings	●
Alarm sound size adjustable modes	●
Multiple alarm sound selection modes	○
Before and after the unilateral zone alarm indicators	○
The front side zone alarm indicator	/
In front of the bilateral zone alarm indicator	●
Before and after four zones alarm indicator	●
The sensitivity of each detecting zone is adjustable	●
The adjustable sensitivity is 1-400 of each zone	●
The adjustable sensitivity is 0-120 of each zone	/
Choose the overall safety level of 1-6	/
Choose the overall safety level of 1-20	●
12 independent probes, 6 interactive detecting zones	●
12 independent probes, 12-18 interactive detecting zones	○
2 hours of battery life	○
8 hours of battery life	●
Restore factory settings	○

Note: The table "●" indicates this configuration, "○" indicates possible option, "/" indicates no such configuration